


## APPENDIX B. WIRING DIAGRAM - REMOTE CONTROL UNIT

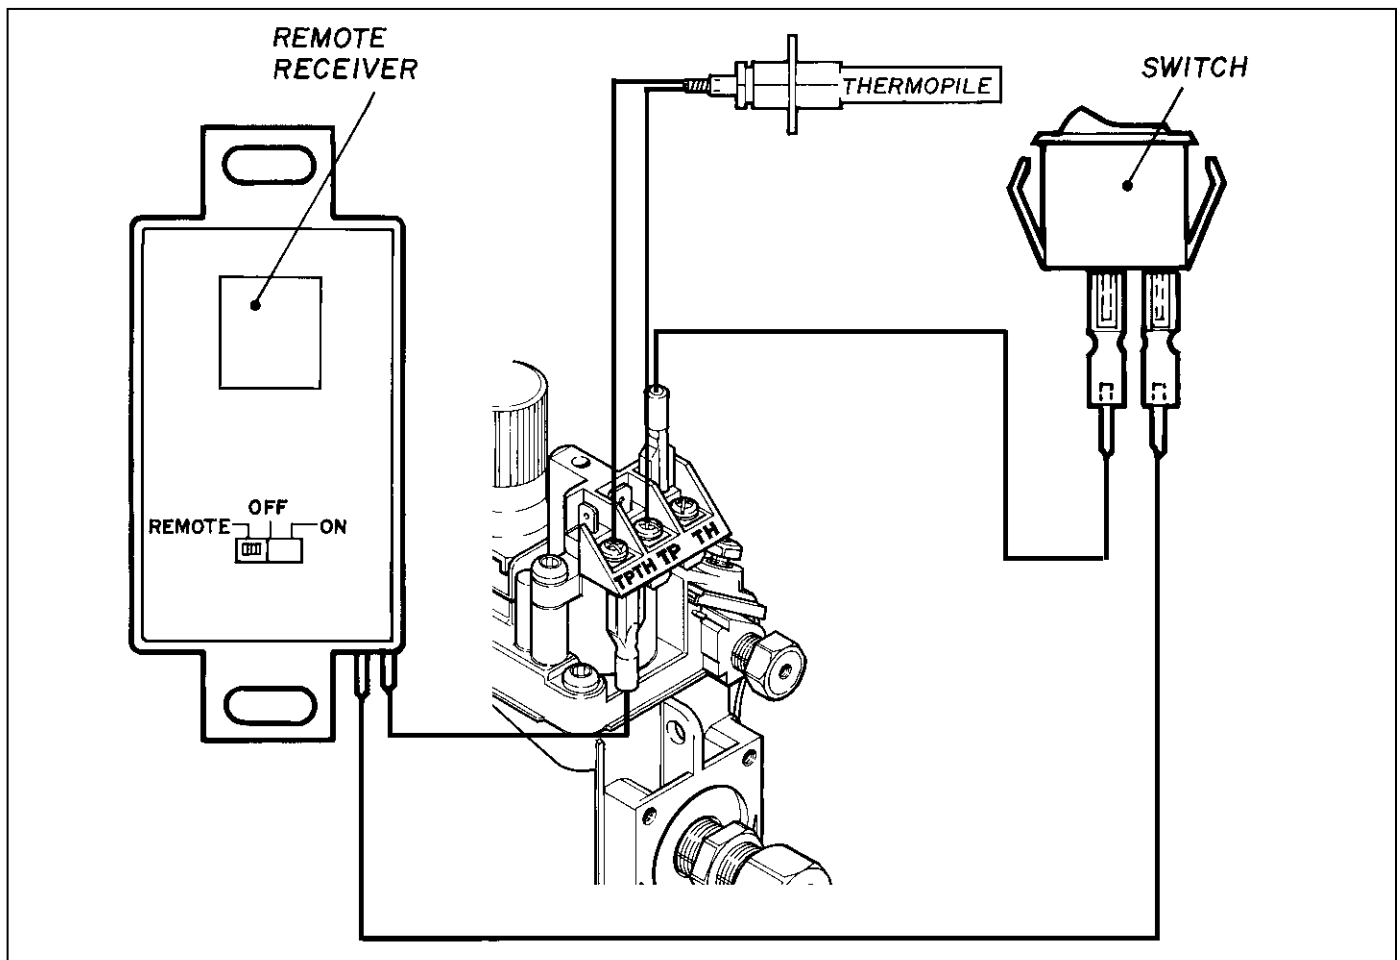

The remote control should be wired in a series as diagramed above. To operate the remote, the pilot must be lit and both the gas control knob and the on/off toggle must be turned on. Turn the Remote Receiver to “on”, and operate the Fireplace with the hand-held remote.

### INSTALLATION INSTRUCTIONS FOR OPTIONAL REMOTE CONTROL RECEIVER

1. Disconnect the wire from the bottom of the controller unit which is attached to the tab labeled “TPTH”.
2. Connect the wire you just disconnected to the wire from the Remote Receiver with the male spade connector. (This is the only wire that will fit).
3. Connect the second wire from the Remote Receiver to the bottom tab labeled “TPTH”.
4. Mount the device as described in the instructions that were included with the Remote Control Unit.