


FIREVIEW MODEL 205

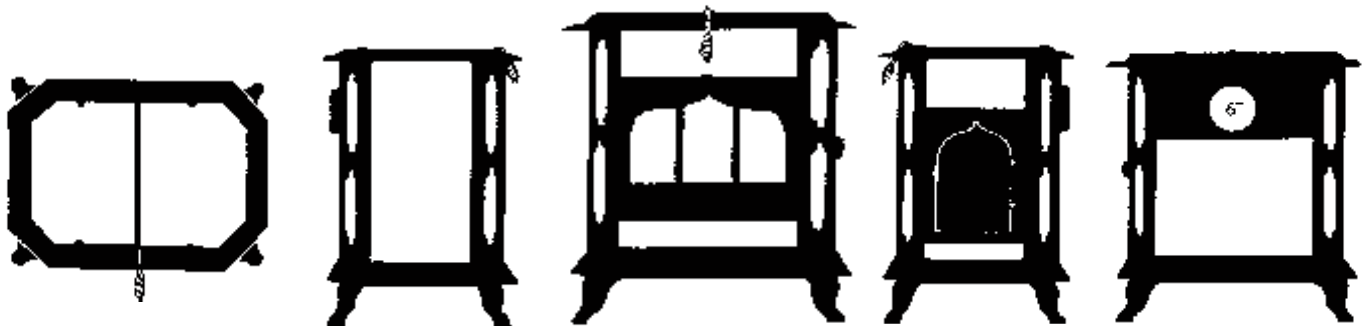

WOODSTOCK SOAPSTONE STOVES

OWNER'S MANUAL

Tested To UL 1482-2011 7th Edition
Listed By PFS Corporation

Tested and Listed by



Woodstock Soapstone Company, Inc.
66 Airpark Road, West Lebanon, NH 03784
Toll Free 1-800-866-4344 • www.woodstove.com

Rev 02/20

OUR PROMISE

We are sure you will enjoy your new stove. During the first six months that you own it, test its performance and experience the comfortable warmth of soapstone. If you are not thoroughly delighted with the beauty, quality, and energy efficiency of your stove, you may return it for a full refund, including the cost of return freight. This is the best consumer protection plan in the industry.

EPA APPROVAL

This Manual describes the installation and operation of: the **Model 205 Fireview Catalytic Soapstone Stove**.

Model 205 Fireview Catalytic Soapstone Stove meets the U.S. Environmental Protection Agency's emission limits for wood heaters sold after May 15, 2020. Under specific test conditions, this stove has been shown to deliver heat at rates ranging from 7,606 to 46,460 BTU/hr., and average emissions of 1.12 grams/hr.

The Fireview model contains a catalytic combustor, which needs periodic inspection and replacement for proper operation. It is against the law to operate this woodstove in a manner inconsistent with the operating instructions in this manual, or if the catalytic element is deactivated or removed.

This wood heater has a manufacturer-set minimum low burn rate that must not be altered. It is against federal regulations to alter this setting or otherwise operate this wood heater in a manner inconsistent with operating instructions in this manual.

Tested and Listed by



LISTING TO UL #1482

Model 205 Fireview Catalytic Soapstone Stove has been tested to UL Standard #1482 7th edition 2011 for safety, and is listed by PFS Corporation. UL Standard #1482 is the standard for testing solid fuel heating appliances which is universally recognized by all national building regulatory agencies (SBCC, BOCA, ICBO) and individual states.

Please Note: Tested and Listed for US installations only

LIMITED WARRANTY

Your Woodstock Soapstone Stove will be carefully inspected before shipment. We will replace any part which is defective in material or workmanship, free of cost, for a period one year from the date of purchase. If a defect is discovered, please contact Woodstock Soapstone Company, Inc. for instructions regarding return or replacement of the defective part.

CATALYTIC COMBUSTOR WARRANTY

The catalytic combustor in your Fireview Woodstove is fully warranted for three years from the date of purchase against any defect in workmanship or materials that prevent the combustor from functioning when installed and operated properly. The catalytic combustor is additionally warranted for three years from the date of purchase for any deterioration in the stainless steel substrate material. For instructions regarding return or replacement of the catalytic combustor, please contact:

Woodstock Soapstone Company, Inc.
66 Airpark Road
West Lebanon, NH 03768
Phone: 1-800-866-4344 • Web: www.woodstove.com

MODEL 205 FIREVIEW CATALYTIC TABLE OF CONTENTS

| | |
|---|--------------|
| WARRANTY INFORMATION / CERTIFICATIONS..... | Inside Cover |
| EPA Certification, UL Listing, Warranty, Catalytic Combustor Warranty | |
| INSTALLATION..... | 1-11 |
| Installation, Location, Chimneys, Fireplace Installation, Clearance Table, Wall Protection, Floor Protection, Mobile Home Installation | |
| OPERATION..... | 12-16 |
| Setting up Your Stove, Seasoning Your Stove, Starting a Fire and Establishing Draft, Engaging the Catalytic Combustor, Reloading & Overnight Burning, Ash Removal, Surface Thermometer, Overfiring, Daily Use, The Fall Away Handle, Firewood | |
| CATALYTIC COMBUSTOR..... | 17-20 |
| How your Combustor Works, Inspection & Cleaning, Replacement, Catalytic Probe Thermometer, Frequently Asked Questions, Catalytic Combustor Warranty Information | |
| MAINTENANCE..... | 21-23 |
| Stove, Stone & Glass Cleaning, Gasket Replacement, Routine Checks, End Of Season Maintenance, Creosote | |
| TROUBLESHOOTING..... | 24-26 |
| SAFETY..... | 27-28 |
| Overview, Installation, Smoke & The Chimney, Heat, Ash Removal, Precautions, Emergency Procedures | |
| PARTS LIST & DIAGRAMS..... | 29-31 |
| SPECIFICATIONS..... | Back Cover |

DIMENSIONS & SPECIFICATIONS

H x W x D 28" x 26" x 20"
 Flue Exit Back Only
 Flue Size 6"
 Flue Height to Center (Back Vent) 22.75"
 Weight 485 lbs.
 Loading Door Right Side Standard
 Loading Door Size (HxW) 10.5" x 8.25"
 Wood Length (Recommended) 16"
 Firebox (H/W/D in inches) 13" x 12.5" x 20"
 Firebox Size 1.85 Cubic ft.
 Burn Time 10-12 hrs.
 Heat Output Range 7,606 - 46,460 BTU/hr
 Area Heated 900-1,600 sq. ft.
 EPA Certified (Meets 2020 standards) Yes
 Listed to UL 1482 Yes
 EPA Emissions Rating 1.12 grams/hr

EPA Efficiency (LHV) 83.6%
 EPA Efficiency (HHV) 77.7%
 Catalytic Combustor Standard
 Ash Pan N/A
 Back Clearance (no protection) 30"
 Back Clearance (w/Heat Shield Kit) 18"
 Side Clearance 18"
 Mobile Home Approved Yes

