

Part#FVKPUCKIT: Fireview 205 Under Combustor Gasket Kit

Rev. Date 7/26/2021

Parts Needed:


- (3') 1/4" rope gasket
- (1) Bottle gasket glue

Tools Needed:

- Putty knife
- Scissors
- 1/2" Wrench
- WD-40, Kroil, PB Blaster, or similar penetrating liquid



1. Make sure the stove is cool. You will need 3' of .250" gasket and gasket glue.
2. Open and remove the top lid to access the catalytic combustor area of the stove. Remove the combustor from the stove. A 1/2" wrench or socket may be necessary to remove the retaining bolts.

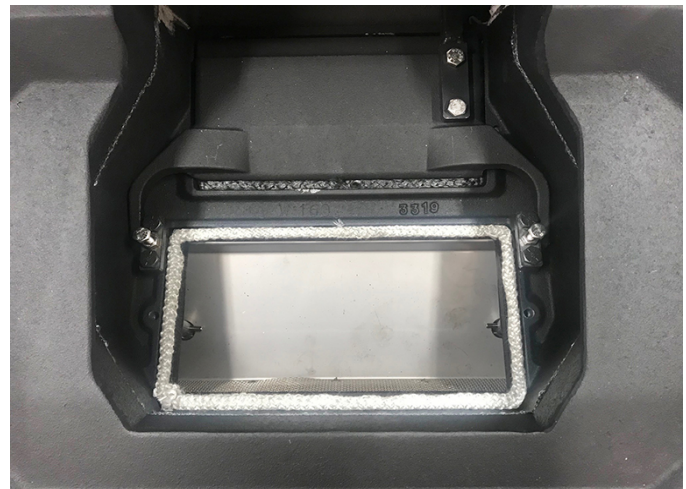


3. Use a putty knife or flat-head screwdriver to remove the old gasket from the area directly under the combustor. Remove any residual gasket and glue with a wire brush and vacuum.
4. Apply a 3/16" bead of gasket glue into the gasket channel.
5. Start in any corner and press gasket into the channel. Push back slightly on the gasket as you round the corners to ensure full coverage. Use sharp scissors to cut the proper length.



Woodstock
Soapstone
Company, Inc.

6. Return the combustor to the stove. Finger-tighten retaining bolts if using a stainless steel catalytic combustor.

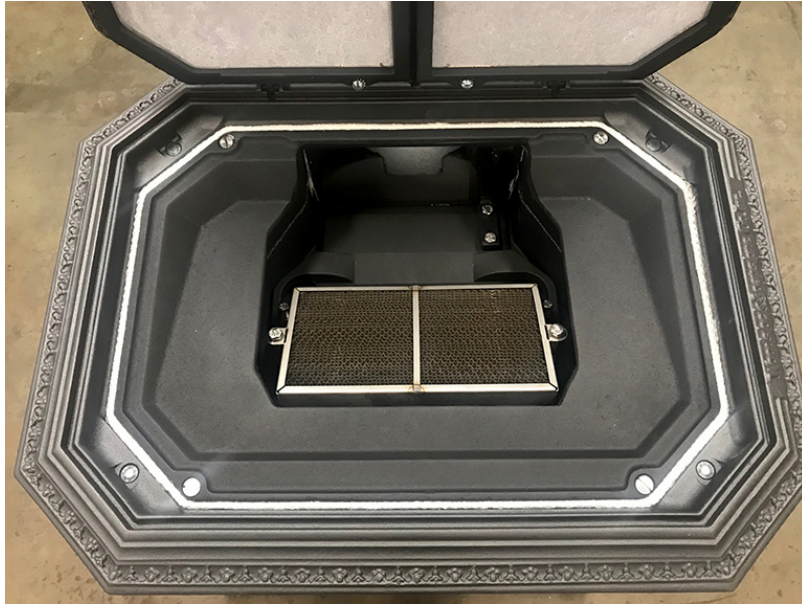

7. Return the lid to the stove.

We need your help! Woodstock Soapstone Co. takes great pride in providing the highest quality products as well as the best customer service in our industry. We welcome your suggestions and input to help us achieve these goals. If you have any comments to improve our products, service, and information provided in these instructions please contact us at (800) 866-4344 or info@woodstove.com. Thank you.