

Part# FV205ADCKIT: Air Duct Perimeter Gasket Replacement

Rev. Date 7/23/2021

2131

Parts Needed:

- (1) Furnace cement
- (6') .250" gasket

Tools Needed:

- Putty Knife
- Wire Brush
- Caulking gun
- Scissors



1. Make sure the stove is cool.
2. Remove the top lid of the stove by lifting straight up on the open lid. The hinge is not attached and the top will lift off.




3. Use a putty knife or flat blade screwdriver to remove the old gasket and cement from around the perimeter of the air duct cover. Remove any residual gasket and cement with a wire brush and vacuum. Do not allow any debris to fall through the gap at the front of the stove, as it may obstruct the air-wash.



4. To install the air duct cover perimeter gasket, first apply a bead of stove cement, large enough to bed the gasket into, across the back and sides. No cement will be applied across the front gap (see image below). The air-wash is located below this front gap, and it is imperative to keep the air-wash free of obstruction.



5. Firmly press the gasket into the stove cement in the channel. It may be necessary to stretch or compress the gasket, as the gap of the channel can be narrower or wider. Use a putty knife to fully seat the gasket.

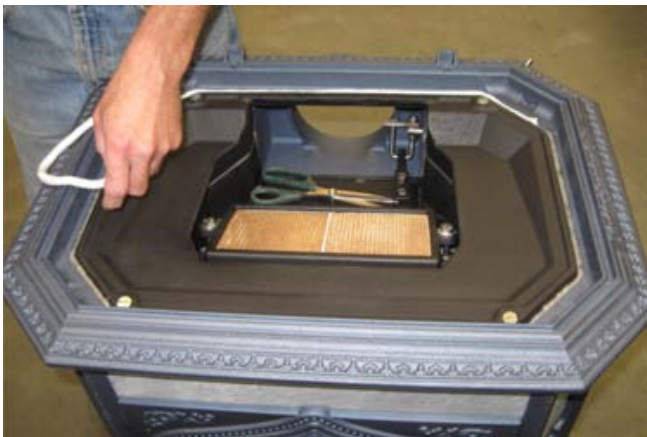

For additional assistance call Woodstock Soapstone at 1-800-866-4344, 9am-5pm Eastern Time, Monday – Saturday.