

Absolute Steel Ash Door Gasket

Please read all the instructions before you begin the procedure. Confirm that you have all the necessary tools and materials. If you have any questions, technical support is available toll free at 1-800-866-4344, Monday-Saturday 9:00 – 5:00 ET

Tools Needed:

- putty knife
- shop vac
- scissors


Materials Needed:

- 3' of 1/2" (0.500) diameter gasket (you will trim to fit)
- gasket glue

Open the ash pan door and clean the door and mating surface with a shop vac. Use a putty knife to pry up the old gasket so you can pull it out, then scrape the channel to remove residue of dried gasket and glue. Vacuum.



Squeeze out a roughly 1/8" bead of glue all around the gasket channel on the door. Starting in the middle of the back, place the gasket into the channel and glue, pushing back on itself slightly to give it some "fluff".

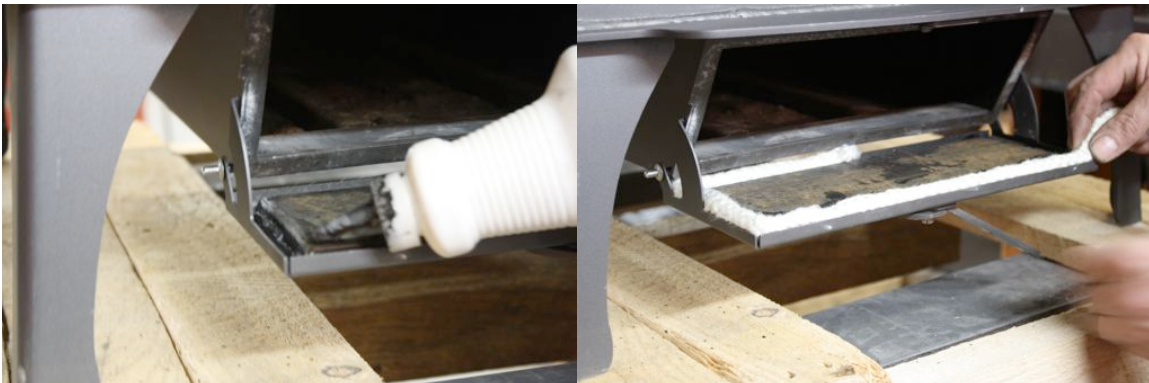

When you get back to the starting point, trim the gasket so that the ends butt together. Close the door firmly (without latching) 2 or 3 times. Place a strip of paper (or a dollar bill) on the gasket and close, and latch, the door. You should feel some tension when you try to pull out the paper, and it should curl slightly. Repeat this in several places around the door.



We need your help! Woodstock Soapstone Co. takes pride in providing the highest quality products as well as the best customer service in our industry. We welcome your suggestions and input to help us achieve these goals. If you have any comments to improve our products, service, and information provided in these instructions please contact us at (800) 866-4344 or info@woodstove.com. Thank you.

Revised 4/27/19